












6	7	8
ITEM	MODIFICATION	DATE
△	新版发行	2016-06-18
		DRAW
		望盛
		APPROVE
		袁俊林



防水圈

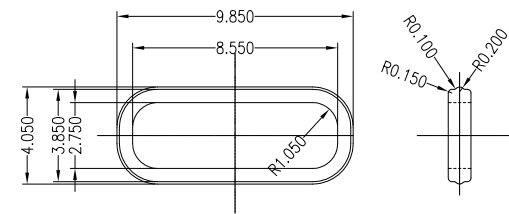

Cap dimensions

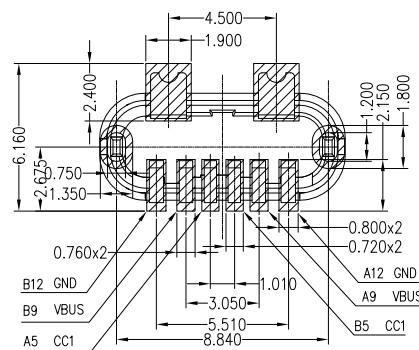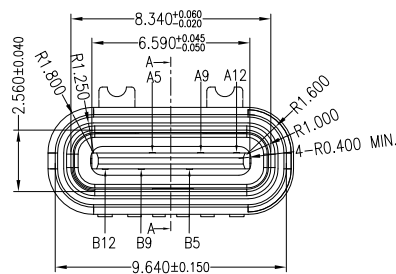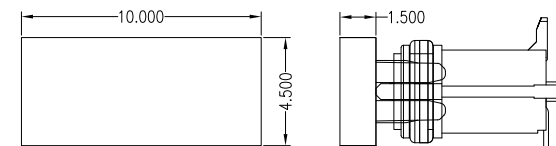

PCB LAYOUT 图仅供参考

Note:

- Material:
 - Housing and cap: High temperature thermoplastic UL94v-0
 - Contact: Copper Alloy
 - Shell: Zinc Alloy
 - Running ring: Silica Gel.
 - Middle plate: SUS
 - ELECTRICAL:
 - CURRENT RATING:
 - VBUS AND GND CONTACTS RATED AT 3A Max
 - VBUS AND GND CONTACTS RATED AT 0.5A Min
 - 0.9Amps Max. for all other contact.
 - PARALLELED FOR A TOTAL OF 5A;
 - INITIAL CONTACT RESISTANCE: 40 MILLIOHMS
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN;
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 5~20N
 - UNMATING FORCE: 8~20N (INITIAL), 6~20N (AFTER 10000 CYCLES)
 - FREQUENCY: 200±50 CYCLES/HOUR, 10000 CYCLES
 - OPERATING TEMPERATURE: -40°~80°.
 - WATERPROOF: IP-X8.
- CX004

4	HOUSING	LCP BLACK
3	RING	RED Silica Gel
2	Shell	Zinc Alloy Ni80u"
1	Contact	C5191 半金雾锡3u+1"
ITEM	DEFINITION	SPEC DESCRIPTION

TABLE B

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X±0.15	Ang.±1°
.XX±0.10	
.XXX±0.05	

PRJ.

DIMENSION STYLE
MM ONLY

DESIGN UNITY
METRIC

SCALE
1:1

CXUN® 东莞市超讯电子有限公司
transcend communication

DRAWN BY 望盛	DATE 2016-06-18	TITLE TYPE C 6PIN 直立式 防水型母座
CHECKED BY 望盛	DATE 2016-06-18	PART NO. BNF01S2204R-W
APPROVED BY 袁俊林	DATE 2016-06-18	MOLD NO. DWG-USB CF-065
		SHEET NO. 1 OF 1
		REV. A0